


CAN OPEN ABSOLUTE SINGLE TURN ENCODER, SERIES FHK515-CANO

- FHK515-CANO, standard encoder Ø58mm with CAN open interface:
- Robust and compact design
- Solid shaft version Ø 10 mm (06 mm available upon request)
- Precision ball bearings with sealing flange
- High temperatures performances -40°C ... +85°C
- Temperature insensitive opto-receiver-asic
- Code disc made of unbreakable and durable plastic
- Resolution : 13 bits = 8192 steps/turn (max 16 bits)
- Polarity inversion and over-voltage peak protection
- Highly integrated circuit in SMD-technology

CANopen




FHK515-CANO (Connection Cap included)

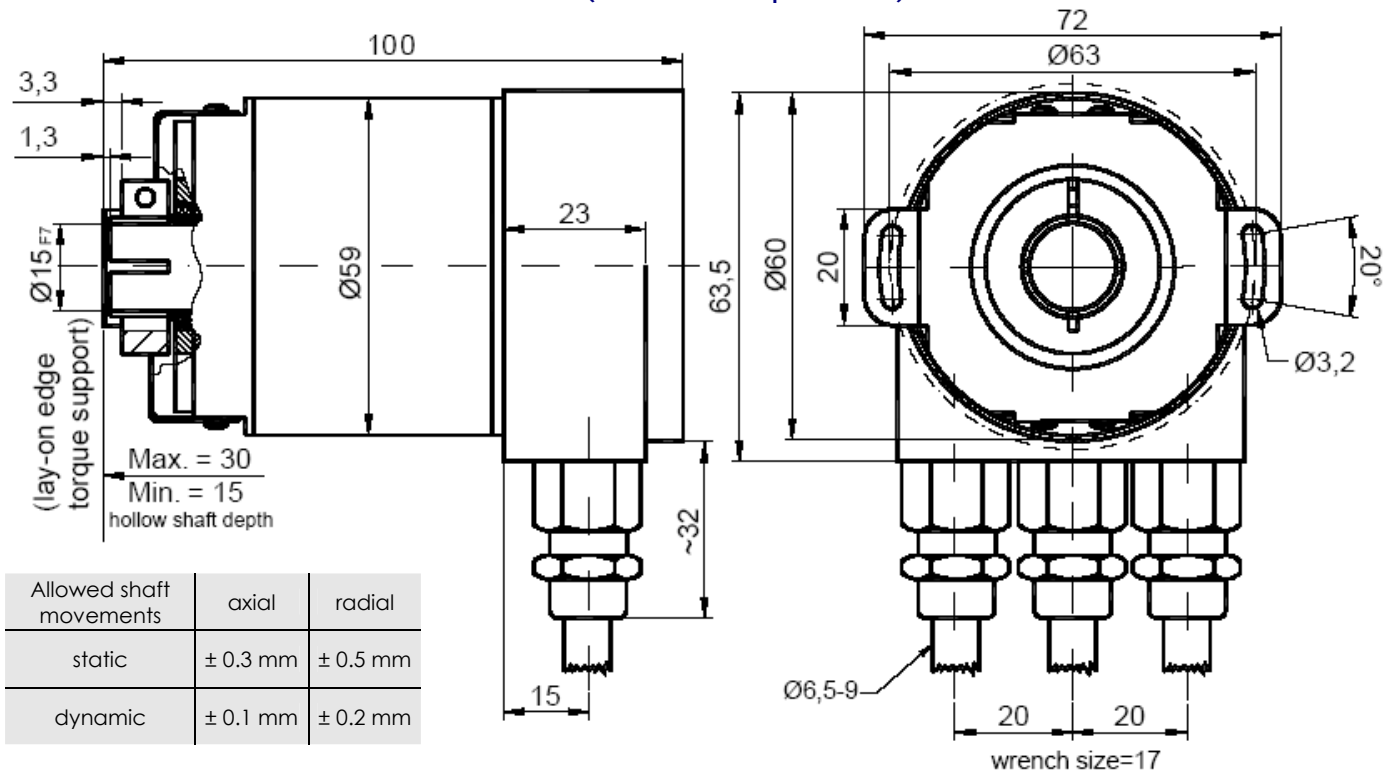

Shaft diameter can be reduced to 12mm, 10mm or 8mm by reduction ring (by inserting them into the hollow shaft)

Status indication with two LED's in the connection cap

| Err - Green LED | Sta - Green LED | Meaning |
|-----------------|-----------------|--|
| off | off | No power supply |
| off | on | Encoder is ready, Boot Up message not sent (no further device on network, wrong baud rate) or encoder in prepared status |
| flashing | on | Boot Up message sent, device configuration is possible |
| on | on | Normal operation mode, Encoder in Operational Status |



MECHANICAL DATA

| | | | |
|--------------------------------------|------------------------|-----------------------------|---------------------------|
| Material Optional stainless steel | Cover : aluminum | Shock (EN 60068-2-27) | ≤ 100 g (half-sine, 6 ms) |
| | Body : aluminum | Shock (EN 60028-2-29) | ≤ 10 g (half-sine, 16ms) |
| | Shaft: stainless steel | Vibrations (EN 60068-2-6) | ≤ 10 g (10Hz... 1 000Hz) |
| Max. shaft loading | Axial : 40 N | Weight | 550 g |
| | Radial : 110 N | Operating temperature | - 40 ... + 85°C |
| Shaft Inertia | ≤ 30 g.cm ² | Storage temperature | - 40 ... + 85°C |
| Friction torque | ≤ 3 N.cm | Humidity | 98 % without liquid state |
| RPM (continuous operation) | 12 000 rpm | Protection class (EN 60529) | Cover: IP65, Shaft: IP64 |

CANOPEN ABSOLUTE SINGLE-TURN ENCODER, SERIES FHK515-CANO

ELECTRICAL DATA

| | | | |
|---------------------|------------------------------|----------------------|---------------------------|
| Interface | Line driver RS485 | Power consumption | max 2,5W |
| Transmission rate | Max 1Mbauds | Step frequency LSB | 800 kHz |
| Device addressing | By rotary switches | Accuracy of division | + ½ LSB (12 bits) |
| Power Supply | 10 – 30Vdc (absolute limits) | EMC | EN 61000-6-4 EN 61000-6-2 |
| Current consumption | max. 100mA (24Vdc) | Electrical lifetime | > 10 ⁵ h |

TRANSMISSION MODE

| | |
|-------------|---|
| POLLED Mode | By a remote-transmission-request telegram the connected host calls for the current process value. The absolute rotary encoder reads the current position value, calculates eventually set-parameters and sends back the obtained process value by the same identifier |
| SYNC Mode | After receiving a sync telegram by the host, the absolute rotary encoder answers with the current process value |
| CYCLIC Mode | The absolute rotary encoder transmits cyclically - without being called by the host - the current process value. The cycle time can be programmed in milliseconds for values between 1 ms and 65536 ms |

PROGRAMMABLE PARAMETERS

| | |
|-----------------------------|---|
| Operating Parameters | This parameter determines the counting direction, in which the output code increases or decreases. As an important operating parameter the code sequence (complement) can be programmed |
| Resolution (pos./turn) | Each value between 1 and 8192 can be programmed |
| Field bus parameter | Baud rate and CAN-identifier |
| Preset Value | The preset value is the desired position value, which should be reached at a certain physical position of the axis. The position value is set to the desired process value by the parameter pre-set |
| Limit Switch, Min. and Max. | Two software limit switches can be set. If the position value falls below the lower or exceeds the higher limit switch, a status bit in the process value is set. |
| Cam | One free programmable cam can be set in the total measuring range. The same functionality is realized like a mechanical cam unit |


INSTALLATION

The rotary encoder is connected with two or three cables depending on whether the power supply is integrated into the bus cable or connected separately. If the power supply is integrated into the bus cable, one of the cable glands can be fitted with a plug. The cable glands are suitable for cable diameters from 5.5 up to 9 mm

CONFIGURATION

The setting of the node number is achieved by 2 rotary switches in the connection cap. Possible addresses lie between 0 and 89 whereby every address can only be used once. **Inside the encoder the defined address is increased by one.** The connection cap can easily be opened for installation by removing the two cap screws

A termination resistor is integrated in the connection cap. The resistor must be switched on if the encoder is connected at the end or at the beginning of the bus. Separation of Bus In and Bus Out signals if termination resistor is activated

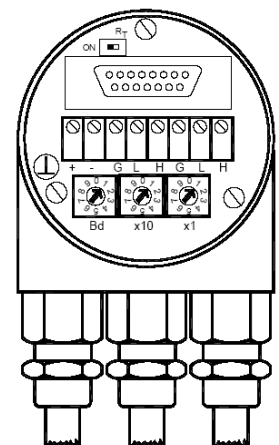

ORDERING REFERENCE (Contact the factory for special versions ex:electronics, special flanges, connections...)

| FHK5 | C2 | B1 | B | 00 | 13 | B | 15 | 0 | 0CC |
|------------------------------|---------|---------|---------------|---------------------|--------------------------------------|-------------|-----------------------|---------------------------|----------------|
| Absolute single-turn encoder | CANopen | Version | Code : Binary | Single turn encoder | Resolution : 2 ¹³ (8 192) | Blind shaft | Shaft diameter : 15mm | Without mechanical option | Connection Cap |